


Eagle Magnetic has recently added the Haeger 618 Plus to its line of hardware installation equipment.

The increased speed of the automatic feed allows Eagle to minimize the lead-time and insure our customers receive the highest quality in addition to cost savings.

618 Plus— The Economical 618 Plus – for Capacity and Versatility

618 Plus Features:

- ▶ 6 tons (54kN) ram force and 18 inch (457mm) throat depth
- ▶ Reliability and energy efficiency of a fully hydraulic machine
- ▶ Speed increases by 15% over the legacy Haeger 618
- ▶ Equipped with Haeger's patented Safety System
- ▶ Robust hydraulics with in-tank hydraulic filter system
- ▶ Variable dwell timer for use with hard materials
- ▶ Adjustable ram retract position

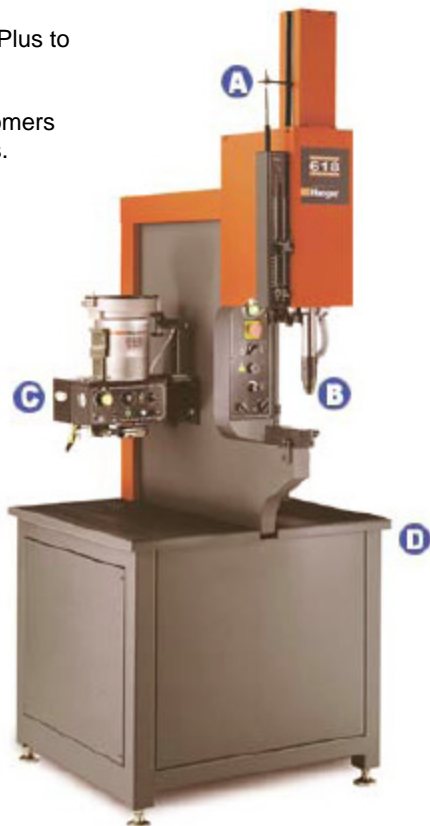

A. Tooling Protection System (TPS) and Positive Stop

The 618 Plus is available with an *optional* Tooling Protection System and Positive Stop Cylinder. The positive stop is designed for use with soft materials such as PC boards, plastics, fiberglass and aluminum—it allows fasteners to be inserted without crushing or deforming the part. The Tooling Protection System helps you save time and money on labor. The TPS ensures you use the correct tooling which protects your tools, and eliminates damage to your parts from incorrectly inserted fasteners.

B. Haeger's patented Safety System, Variable Dwell Timer and Adjustable RAM Retract Position

Haeger's patented Safety System is effective at any point in the ram stroke irrespective of the tooling length, requiring no set up by the operator; thus not affecting initial machine set up time. The variable dwell timer is available for inserting fasteners into stainless steel.

C. MAS (Modular Autofeed System)

The 618 Plus can be equipped with an optional MAS (Modular AutoFeed System) unit. Autofeeding is three times quicker than manual insertion and empowers you to: Automatically orientate, singulate, and feed nuts, studs, and standoffs without having to change the autofeed bowl, experience fast and easy tooling change-over, change-over from nuts to studs or standoffs in less than three minutes, and feed up to 2,000 fasteners per hour. The machine shown here includes optional MAS-9 and Tooling Protection System.

D. Robust Hydraulics with In-Tank Hydraulic Filter System

Experience the reliability and energy efficiency of a fully hydraulic machine and hydraulic pressure repeatability within 1%.